




40.47M GENERATING SET

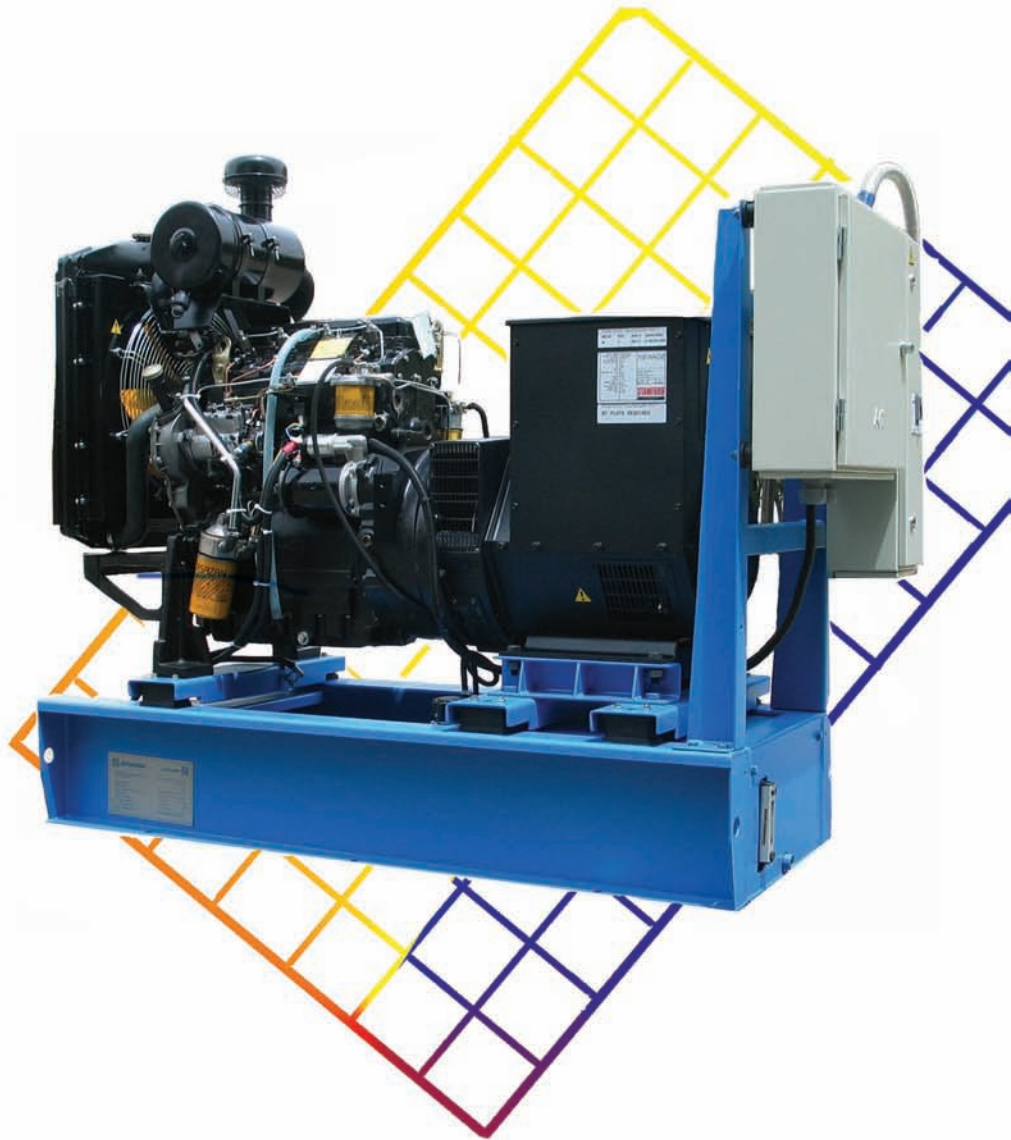

Performance

Engine speed rev/min	Type of operation	Output rating kVA
1500 (50HZ)	Prime power	42.5
	Standby power	46.8



Motorsazan company is certified by TUV NORD for conformity with ISO /TS/16949, ISO 9001, ISO18001, ISO 14001 standards

All ratings based on operating under ISO 3046 condition using typical fan sizes and drive ratios. For operation outside of these condition please consult with Motorsazan company. Performance tolerance quoted by Motorsazan is ±5%.

Electrical ratings assume a power factor of 0.8 and a generator efficiency of 90%.

Fuel specification:BS2869 Part 2 1998 Class A2 or ASTM D975 D2.

Rating Definitions:

Prime power: Power available at variable load in lieu of main power network. An overload of 10% is permitted for one hour in every twelve hours of operation.

Standby power: Power available at variable load in the event of a main power network failure. No overload is permitted.

Standard Specifications

Engine:

Make: Motorsazan
Model: 4.248 G
Air filter: Mounted air filter
Fuel system: Rotary fuel injection pump, mechanical governing, single cartridge fuel filter and prefilter
Lubrication system: Gray cast iron oil-sump with filler and dipstick, spin-on full-flow oil filter
Cooling system: Belt driven circulating pump, 17" metal pusher type fan, mounted radiator and pipework
Number of cylinders: 4
Cylinder arrangement: Vertical, in line
Cycle: 4 stroke
Induction system: Naturally aspirated
Cubic capacity: 4.07 litres (248 cu-in)
Bore: 101 mm (3.975 in)
Stroke: 127 mm (5in)
Compression ratio: 16:1
Direction of rotation: Clockwise viewed from front
Firing order: 1,3,4,2
Total lubrication system capacity: 7.5 litres
Coolant capacity (including radiator): 16 liters

Alternator:

Make: Newage International Limited-England
Model: Stamford UC DI224C1
Specification: Single bearing, 4 poles, 3 phase
Standby power: 46.8 KVA
Prime power: 42.5 KVA


Chassis:

Sheet metal of 5mm thickness, daily usage fuel tank, engine and alternator securely coupled and mounted on flexible rubber mountings.

Electrical system:

Twin sheet metal cases, 1.5 mm metal thickness, including lockable auxilliary protection door and special rubber mountings to minimize panel vibration
 Manual Deepsea PLC Model 701 HC with hour counter
 Automatic shut down device on fault conditions
 Ammeters
 Voltmeter with 7 positions selector switch
 Frequency meter
 Engine oil coolant temperature gauge
 Charge alternator current ammeter
 Emergency stop push button
 65 Amp C.B. switch mounted on secondary case
 Maintenance free 12V battery

Fuel consumption litres / hour	
Power rating	1500 rev/min
Standby power	11.9
Prime power	9.5
75% of prime power	6.6
50% of prime power	4.3
25% of prime power	2.3

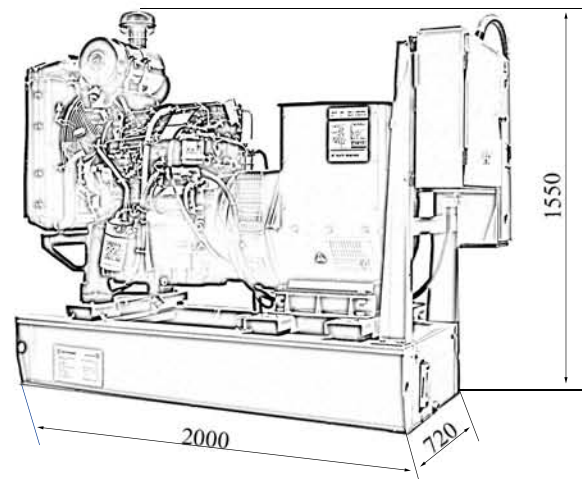

All dimensions are in mm

Factory address:
 Motorsazan Co., ITMCO Complex, Sardroud Road,
 Tabriz-Iran, P.O.BOX 51845-337
 Tel: +98(411) 4248000
 Fax: +98(411) 4245945-46
 Website: www.motorsazan.ir
 Email: mail@motorsazan.ir

- The illustrations may include some optional equipments.
- Motorsazan reserves the right to modify product specifications without prior notice.